

L-7019B S2 SRC

Clean Room Work Shoes

Low Cut Work Shoes is made with Black Micro Fiber Upper and PU Injection Outsole. It is approved by Europe SGS Lab with CE S2 category.



Upper : High Quality Water Resistant Micro Fiber

Lining : Breathable Sandwich Air Mesh

Insole : Comfortable EVA Coated Mesh

Outsole : PU Injection

Toecap : Composite Toecap

Size : EU 37-47#, UK 3-13#, USA-14#

CE EN ISO 20345:2011 S3 SRC

Application : Kitchen, Clean Room, Workshop, Garden, Hospital etc



200 JOULE
TOECAP



SLIP-
RESISTANT



SHOCK
ABSORPTION



ANTI-STATIC



PETROL AND
CHEMICAL
RESISTANT



WATER
RESISTANT



OIL
RESISTANT



ELECTRO-STATIC
DISCHARGE



Composite Toe Cap Protection • AN1-EN12568

It is made with light weight fiber-glass material, which can reach 200 joules from falling or rolling objects. It is stronger and more light than steel toecap.



Water Resistant Cow Leather Upper • CE EN ISO 20345:2011

High quality cow embossed leather with thickness 1.6-1.8mm. It is treated with water resistant coating to protect feet from raining workday. Tear strength is required 10% higher than Europe test requirement, to reach longer lifespan.




Heavy Duty PU/PU Outsole • CE EN ISO 20345:2011

The outsole is made with PU/PU dual density material. The midsole is 45±5 degree hardness PU, which is soft and shock absorption. The outsole is 65±5 degree hardness PU, which is tough and abrasion resistant. The outsole can pass SRC slip-resistant test.

Sole Bonding Strength Test

- EN ISO 20344:2011, 5.2 (Between Upper & Sole)
- Average Test Result 5.8 ± 5 (N/mm)

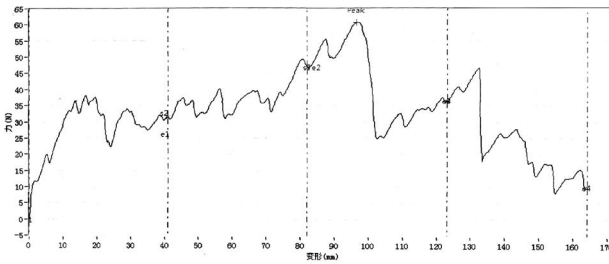

Upper, Lining & Bonding Strength Test Result

| | |
|---------------------------------|------------------------|
| Upper Tear Strength \geq | 120.0 Newtons |
| Upper Tensile Properties \geq | 15.0 N/mm ² |
| Lining Tear Strength \geq | 15.0 N/mm |
| Bonding Strength \geq | 4.0 N/mm |

| ✓ Protection With Slip Resistant (SRC) | Result |
|--|--|
| Test Requirement : SRA (Eurotile 2+Nal S) Forward Heel Slip ≥ 0.28 & Forward Flat Slip: ≥ 0.32 SRB (Steel Floor+Glycerine) Forward Heel Slip ≥ 0.13 & Forward Flat Slip: ≥ 0.18 | PASS |
| Standards : EN ISO20344:2011(5.11) , SRC Means both SRA & SRB requirements are fulfilled. | |
| ✓ Protection With Anti-Static | Result |
| Test Requirement : Anti-static 100K Ω -1000M Ω , Test Voltage: 100 \pm 2 V DC , Test Period: 1 Minute | PASS |
| Standards : EN ISO 20344:2011(5.10) Dry Humility (30 \pm 5) & Wet Humility (85 \pm 5) | |
| ✓ Protection Resistant to Fuel Oil | Result |
| Test Requirement : Change in Volume and Change in Hardness (Outsole) is No More Than +12%(*) | PASS |
| Standards : EN ISO 20344:2011(8.6.1) | |
| SAFETOE Standard Package Instruction (Average 42# for Reference) | |
| Shoes Weight : 1.1-1.2 KGS /Pair | Carton Weight : 12-13 KGS /Carton |
| 1 Pair / Color Box , Dimensions : 32 \times 21 \times 12CM | 10 Pair / Carton , Dimensions : 62 \times 43 \times 33CM |



User Instructions:

- 1.) RECOMMENDED TO USE : Construction, Logistics, Mechanics, Glasses Installation, Factory Workshop, Farming, Garden, Garage etc.
- 2.) LIMITATION TO USE: It is very important that footwear selected must be suitable for the right workplaces. The protection against risks or hazards which are not mentioned in this document is not warranted.
- 3.) FITTING & SIZE: All footwear are marked with standard size on tongue label. Some are with different size comparison, such as EU size, UK size, US size etc. Please wear footwear in a suitable size.

- 4.) STORAGE: Keep the footwear in its original packaging, under ordinary temperature, non-humidity conditions and in clean, covered and ventilated premises.
- 5.) CLEANING: Clean footwear regularly by high quality cleaning treatments recommended as suitable for the purpose. Don't use caustic or corrosive cleaning agents.